

400/N tube elements



Tubing for panel mount pumps

Features and benefits

- Consistent and accurate flow rates
- Optimized tube life
- Tubing elements are optimal fitted to the design of each pump type




Technical specifications

	400/N tube elements
Wall thickness	0.04 in (1 mm)
Compatible pumps	400F/N2

	400/N tube elements
Tubing	Silicone, Thermoplastic elastomer
Connector material	Polypropylene

400/N tube elements dimensions

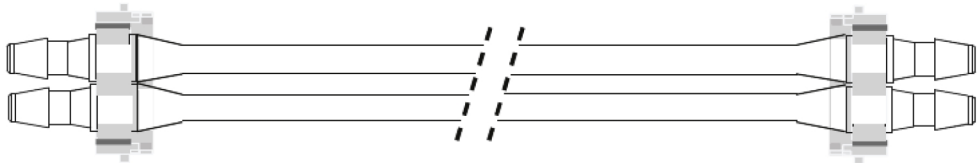

(one element per two channels)

Product codes

Bore/Wall	Bioprene	Peroxide cured Silicone	Connects to
0.5/1.0 mm	049.EF6N.N05		Tube bore 3.0
1.0/1.0 mm	049.EF6N.N10	049.EH6N.N10	Tube bore 3.0
2.0/1.0 mm	049.EF6N.N20	049.EH6N.N20	Tube bore 3.0
3.0/1.0 mm	049.EF6N.N30	049.EH6N.N30	Tube bore 3.0

Disclaimer: Watson-Marlow, Pumpsil, PureWeld, LoadSure, LaserTraceability, Bioprene and Marprene are registered trademarks of Watson-Marlow Limited. STA-PURE PCS and STA-PURE PFL and Style 400 are trademarks of WL Gore & Associates Inc. Please state the product code when ordering pumps and tubing.



wmfts.com/global
28 October 2025