


FC10

Table top screw capping machines

Features and benefits


- Designed for small batch production
- Provides consistent closure torque for screw-threaded bottle capping
- Protect operators from repetitive strain injuries caused by manual capping
- Suitable for wide range of caps and bottles
- Easy adjustment and change-over between bottles or caps
- Compact footprint to fit inside BSC or LAF



Technical specifications

	FC10
Ingress Protection	IP31
Torque rating	Black spring 1.0-4.0 Nm; Yellow spring 0.9-1.8 Nm; Green spring 0.5-1.0 Nm; Red spring 0.3-0.5 Nm
Standards	DS/EN ISO 12100 DS/EN 60204 2006/42/EC 2006/95/EC 2004/108/EC
Sterilisation methods	Vaporised Hydrogen Peroxide (VHP) compatible
Power supply	110/230 VAC, 50/60 Hz
Power consumption	Max 50 W
Air supply	6 bar clean and dry air
Weight	26 lbs (12 kg)
Packaged Weight	16.1 kg
Packaged Dimensions	74*51*30 cm
Accessories	Cap tools, bottle tools
Max. bottle/vial diameter	55 mm
Max. bottle/vial height	180 mm
Max Capacity	1000 units/hour

FC10 dimensions

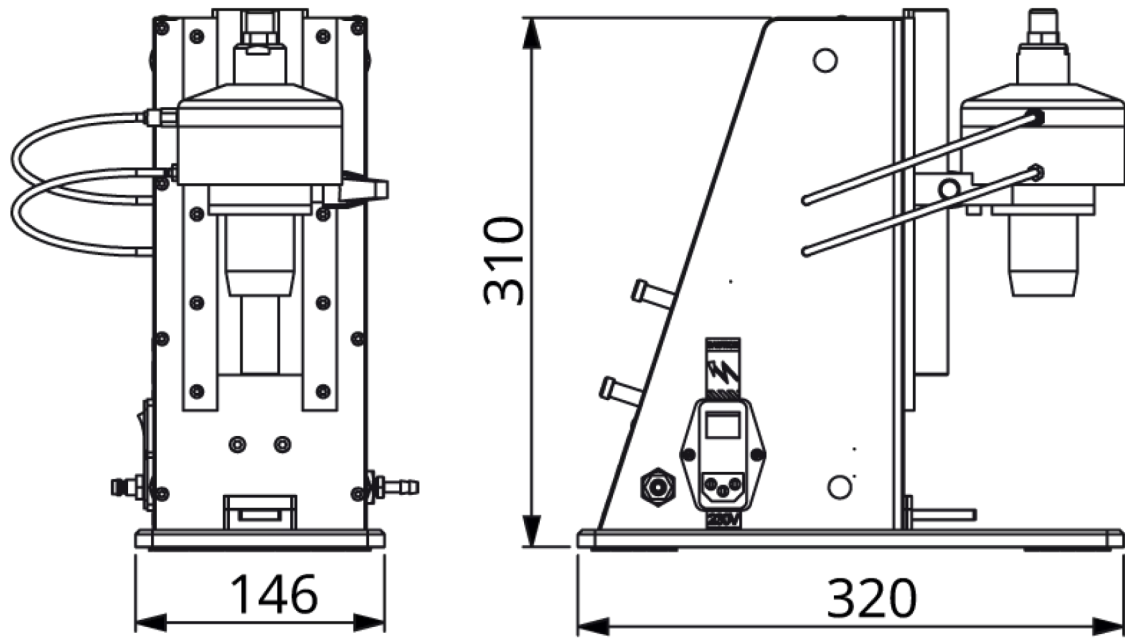

FS10

Units in mm

Disclaimer: The information in this document is believed to be correct, but Watson-Marlow Flexicon A/S accepts no liability for any errors it contains, and reserves the right to alter specifications without notice. WARNING: These products are not designed for use in, and should not be used for, patient-connected applications. WMArchitect and Accusil are registered trademarks.



wmfts.com/global
01 June 2026