


Medium wall, single braid hoses



Smoothbore PTFE hose

Features and benefits

- PTFE-lined high pressure hose
- Temperature resistant
- Chemical resistant
- Self-cleaning

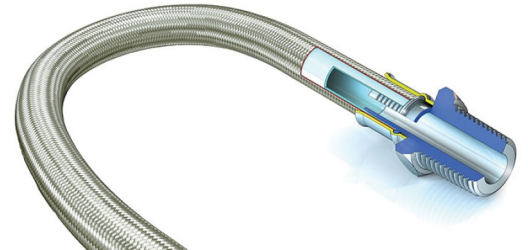

Medium wall, single braid hoses performance

Medium wall, single braid (MW, SB), also referred to as Hyperline SB														
The Hyperline MW, SB Range meets or exceeds SAE 100R14 standard.														
Bore size (Nominal) BB=Big Bore	Bore size (Actual)		Dash size ref (if any)	PTFE tube wall thickness		Braid outside diameter		Minimum bend radius		Max working pressure		Weight per unit length		*Part number
	mm	in		mm	in	mm	in	mm	in	Bar	Psi	Kg/mt	Lbs/Ft	
1/16 BB	2.0	0.079	-2	1.00	0.040	5.00	0.197	13	1/2	450	6,500	0.045	0.030	70-300-02-01-02
1/8 BB	3.5	0.138	-3	1.00	0.040	6.45	0.254	20	3/4	350	5,076	0.070	0.047	70-300-03-01-02
3/16 BB	5.0	0.200	-4	0.76	0.030	7.65	0.301	45	1 1/4	290	4,206	0.078	0.052	70-400-03-01-02
1/4 BB	6.7	0.264	-5	0.76	0.030	9.30	0.366	60	2 1/4	240	3,480	0.110	0.074	70-400-04-01-02
5/16 BB	8.4	0.335	-6	0.76	0.030	10.72	0.422	70	2 3/4	220	3,190	0.136	0.091	70-400-05-01-02
3/8 BB	10.0	0.394	-7	0.76	0.030	12.75	0.500	80	3	190	2,755	0.166	0.111	70-400-06-01-02
1/2 BB	13.3	0.536	-10	0.76	0.030	16.35	0.644	130	5	150	2,175	0.210	0.141	70-400-08-01-02
5/8 BB	16.5	0.654	-12	0.84	0.033	19.50	0.768	163	6 1/2	130	1,885	0.280	0.188	70-400-10-01-02
3/4 BB	19.8	0.780	-	1.00	0.040	22.50	0.860	180	7	110	1,595	0.327	0.219	70-400-12-01-02
1 BB	26.4	1.040	-	1.00	0.040	30.10	1.190	230	9	80	1,160	0.524	0.351	70-400-16-01-02

* For Anti-Static Grade, add 10 to the 3-digit part number e.g. 70-100- becomes 70-110 * For Anti-Static Grade, add 10 to the 3-digit part number e.g. 70-100- becomes 70-110

Technical specifications

	Medium wall, single braid hoses
Nominal bore size	0.0625 - 1 in (1.5 - 25 mm)
Actual bore size	0.079 - 1.04 in (2 - 26.4 mm)
Outside diameter	0.197 - 1.19 in (5 - 30.1 mm)
Max. operating pressure	6500 psi (450 bar)
Burst pressure	3480 - 19,500 psi (240 - 1,350 bar)
Certification and compliance	3.1 Traceability, EN16643:2016, FDA (materials), SAE J1401, SAE J1737, TS 16949:2016
Operating temperature	-100 °F to 500 °F (-73 °C to 260 °C)
Bend radius	0.5 - 9 in (13 - 230 mm)
Weight per unit length	0.03 - 0.351 lb/ft (0.045 - 0.524 kg/m)
Braid	Single
Cover	EPDM rubber, Flexible PVC, Hytrel, Nylon II, Sarlink, Silicone rubber
End fitting	Hydraulic tail end fittings, PTFE tail end fittings

Materials of construction

	Medium wall, single braid hoses
Liner tube	Antistatic PTFE, HPG PTFE, Natural PTFE
Wire braid	Stainless steel

Disclaimer: The information contained in this document is believed to be correct but Aflex Hose Limited accepts no liability for any errors it contains and reserves the right to alter specifications without notice. It is the users' responsibility to ensure product suitability for use within their application. Bioflex, Corroflon, Corroline, Hyperline FX, Pharmaline are registered trademarks of Aflex Hose Limited. A member of Watson-Marlow Fluid Technology Group, A Spirax-Sarco Engineering plc company.



wmfts.com/global
12 December 2025