


Heavy wall, single braid hoses



Smoothbore PTFE hose

Features and benefits

- PTFE-lined high pressure hose
- Temperature resistant
- Chemical resistant
- Self-cleaning

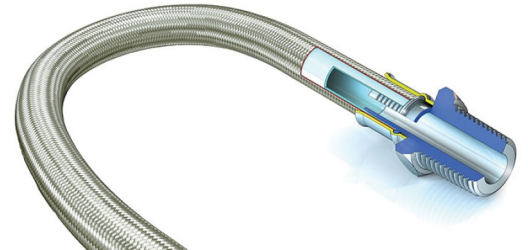

Heavy wall, single braid hoses performance

Heavy Wall, single braid (HW, SB)														
Bore size (Nominal)	Bore size (Actual)		Dash size ref (if any)	PTFE tube wall thickness		Braid outside diameter		Minimum bend radius		Maximum working pressure		Weight per unit length		*Part number
	mm	in		mm	in	mm	in	mm	in	bar	psi	kg/mt	lbs/ft	
1/8	3.17	0.125	-	1.00	0.039	6.10	0.240	20	3/8	290	4,220	0.068	0.046	70-200-02-01-02
1/16	4.76	0.188	-	1.00	0.039	7.65	0.301	29	1 1/8	270	3,929	0.087	0.058	70-200-03-01-02
1/4	6.35	0.250	-	1.00	0.039	9.25	0.364	30	1 1/8	260	3,783	0.113	0.076	70-200-04-01-02
3/16	7.94	0.313	-	1.00	0.039	10.90	0.429	40	1 1/8	230	3,347	0.135	0.091	70-200-05-01-02
1/2	9.53	0.375	-	1.00	0.039	12.50	0.492	55	2 1/8	200	2,910	0.153	0.103	70-200-06-01-02
3/4	12.70	0.500	-	1.00	0.039	15.60	0.614	85	3 1/8	160	2,328	0.240	0.161	70-200-08-01-02
1	15.88	0.625	-	1.30	0.051	19.10	0.752	110	4 1/8	130	1,892	0.292	0.196	70-200-10-01-02
1 1/4	19.05	0.750	-	1.30	0.051	22.05	0.868	145	5 1/8	92	1,339	0.344	0.231	70-200-12-01-02
2	25.40	1.000	-	1.50	0.059	28.80	1.134	260	10 1/8	69	1,004	0.470	0.315	70-200-16-01-02
* For Anti-Static Grade, add 10 to the 3-digit part number e.g. 70-100- becomes 70-110 * For Anti-Static Grade, add 10 to the 3-digit part number e.g. 70-100- becomes 70-110														

Technical specifications

	Heavy wall, single braid hoses
Nominal bore size	0.125 - 1 in (3 - 25 mm)
Actual bore size	0.125 - 1 in (3.17 - 25.4 mm)
Outside diameter	0.24 - 1.134 in (6.1 - 28.8 mm)
Max. operating pressure	4220 psi (290 bar)
Burst pressure	3012 - 12,660 psi (207 - 870 bar)
Certification and compliance	3.1 Traceability, EN16643:2016, FDA (materials), SAE J1401, SAE J1737, TS 16949:2016
Operating temperature	-100 °F to 500 °F (-73 °C to 260 °C)
Bend radius	0.875 - 10.25 in (20 - 260 mm)
Weight per unit length	0.046 - 0.315 lb/ft (0.068 - 0.47 kg/m)
Braid	Single
Cover	EPDM rubber, Flexible PVC, Hytrel, Nylon II, Sarlink, Silicone rubber
End fitting	Hydraulic tail end fittings, PTFE tail end fittings
Vacuum resistance	Vacuum resistant to -0.9bar

Materials of construction

	Heavy wall, single braid hoses
Liner tube	Antistatic PTFE, HPG PTFE, Natural PTFE
Wire braid	Stainless steel

Disclaimer: The information contained in this document is believed to be correct but Aflex Hose Limited accepts no liability for any errors it contains and reserves the right to alter specifications without notice. It is the users' responsibility to ensure product suitability for use within their application. Bioflex, Corroflon, Corroline, Hyperline FX, Pharmaline are registered trademarks of Aflex Hose Limited. A member of Watson-Marlow Fluid Technology Group, A Spirax-Sarco Engineering plc company.



wmfts.com/global
12 December 2025